

3055 Tear Web Energy Absorbing Lanyard

DESCRIPTION

Tear Web Energy Absorbing Lanyard, 1.8 Metre c/w Scaffold Hook on free end and Double Action Safety Hook at the other.

MATERIALS

- 28kN 44mm Polyester Lanyard Webbing
- Tear Webbing Activated Between 2 & 6 kN
- Stamped Double Action Safety Hook
- Forged Safety Scaffold Hook

TESTING

- 100% visual inspection
- Hooks 100% proof tested

FEATURES

- AS/NZ 1891.1 Certified
- Lightweight
- Made in Australia
- Individually serial numbered
- Weight 1.1kg
- Fitted with back up strap
- Clear shrink wrap for ease of inspection
- Stitch patterns easily visible
- Maximum user weight 100kg

FALL CLEARANCE ALLOWANCES

Length of lanyard assembly = up to 1800mm




Height of operator = 1800mm

Residual clearance = 1000mm

Total = 4600mm plus the following values

Fall Distance	Energy Absorber Extension
600mm	300mm
1000mm	500mm
1500mm	600mm
2000mm	900mm

* Calculated from the start position of the lanyard

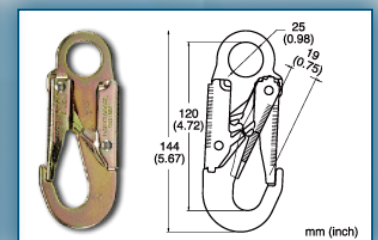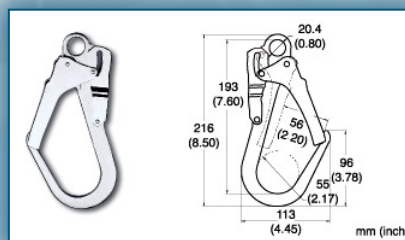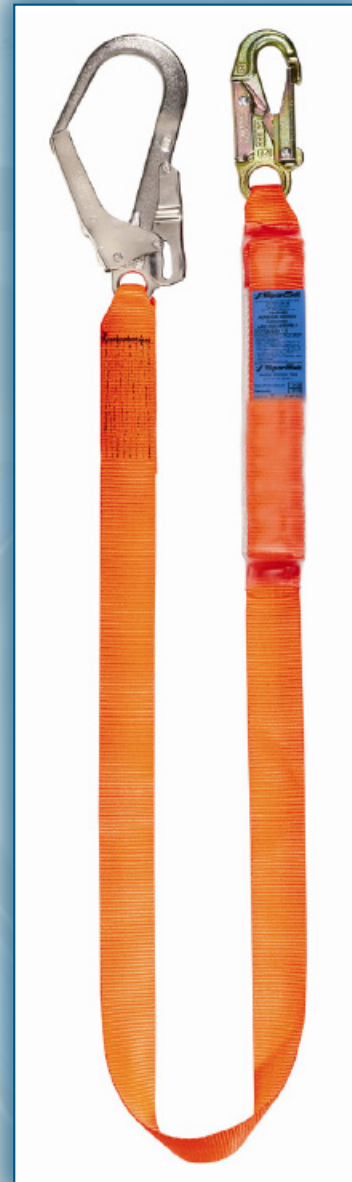

APPLICATIONS

Suitable for all general fall arrest applications
Including roof work, EWPs, maintenance & construction.

COMPATIBILITY

Compatible with all SpanSet fall arrest harnesses except 1150

SPANSET ACCREDITATIONS



Certified manufacturer to AS/NZS 1891.1 "Fall Arrest Equipment"
Certified manufacturer to AS/NZS 1353.1 "Flat Synthetic Webbing Slings"
Certified manufacturer to AS/NZS 4497.1 "Round Slings – Synthetic Fibre"
Certified testing laboratory for all of the above



Certified to ISO 9001 Quality Systems



Certified to NATA National Association of Testing Authorities



Registered Training Organisation
Founding member of FPMA Fall Protection Manufacturers Association
Member Hire Industry Association of Australia

TRAINING COURSES AVAILABLE



- WORK SAFELY AT HEIGHTS: MNMG237A
- WORK SAFELY ON ROOFS: CPCPCM2105A
- WORK SAFELY AT HEIGHTS: CPCCCM1006A
- COMPETENT PERSON PRACTICAL INSPECTION & RECORD KEEPING: MEM15004B
- TOWER & POLE RESCUE: PUAOHS001B , PUASAR001A, PUASAR004A
- VERTICAL RESCUE: PUAOHS001B , PUASAR001A, PUASAR004A
- ENTER CONFINED SPACE: MSAPMPER205B, MSAPMPER200B,
- OPERATE BREATHING APPARATUS: MSAPMOHS216A
- CONFINED SPACE VERTICAL RESCUE: PUAOHS001B , PUASAR001A, PUASAR004A

OTHER PRODUCTS AVAILABLE

- ABS ratchet systems
- Supra Plus Round Slings
- Secutex edge protection
- Web Dog Chain tensioners
- Round Slings to 100 tonne
- Flat Slings To 20 tonne